

2003 Cummins Diesel 5.9L # D7156

2004-2004.5 Cummins Diesel 5.9L # D7157

DiabloSport PowerPuck Installation

*Engine must be off
and key removed
from ignition.*

For technical assistance
please visit our website
www.diablosport.com

DIABLOSPORT™



IMPORTANT NOTICE: Please read before installing the PowerPuck Manufacturer Warranty

By law, the installation of a DiabloSport PowerPuck does not void the manufacturers warranty. However, if there is a time that you need to take your vehicle in for service or repairs, we suggest that you remove the PowerPuck for the following reasons:


- 1) Each individual dealer can, at their discretion, set up their own warranties and policies that would void parts of or the entire warranty by the addition of a non Dodge part.
- 2) It will confirm whether there is a problem with the PowerPuck or with the vehicle.
- 3) Anytime a diagnostic machine is used, the vehicle's computer needs to be in stock condition. In order for the diagnostic machine to accurately perform its task, it must be able to communicate with the stock computer program.

With the PowerPuck installed, the diagnostic machine will not be able to do so. Failure to reinstall the stock tuning can result in unnecessary repairs.



THE POWER PEOPLE

Find your MAP sensor and
Fuel Rail pressure sensor located on
the driver's side of the engine block.

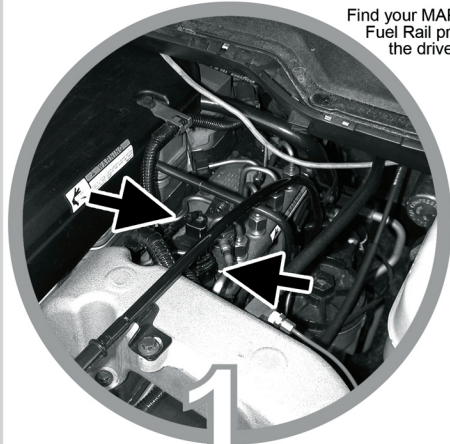


1

Connect the DiabloSport
PowerPuck female sensor
connectors into the
engine sensors.




3

Route PowerPuck cables
appropriately away from
hot and moving
surfaces.

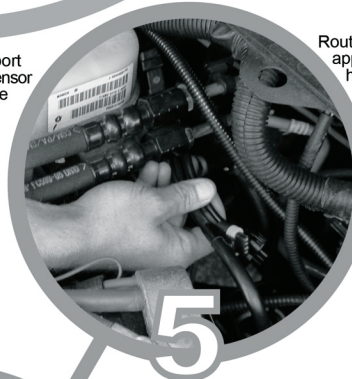


5

The DiabloSport
PowerPuck's base
will be located on top
of the fuse box cover.
(this will allow for quick
and easy access) Clean
the top of the fuse box
with the alcohol pad
provided. Wait for
the alcohol to
dissipate.

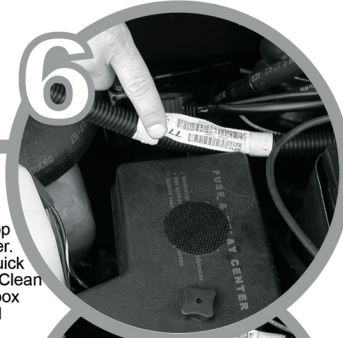

6

Carefully peel off the
Velcro protective film
and firmly affix the
DiabloSport PowerPuck
in place. Let it dry for 24
hours before removing Puck.

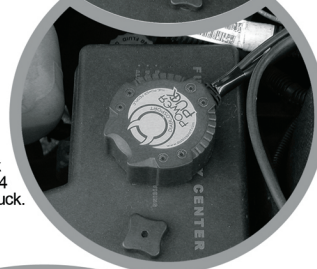


7


Disconnect
your MAP sensor.

Disconnect
your Fuel Rail
pressure sensor.

Connect the
male connectors
of the DiabloSport
PowerPuck cable to
the engine sensor
harnesses.

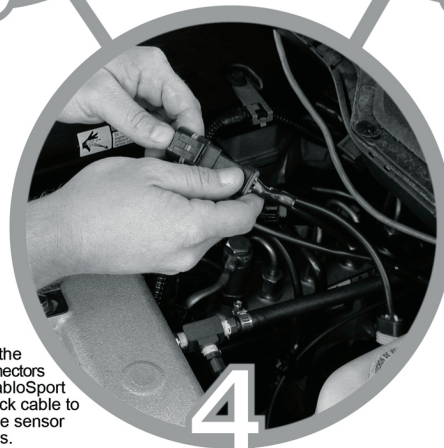

4

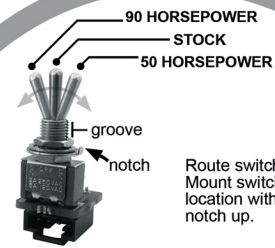

Route switch wire into cabin.
Mount switch in a convenient
location with the reference
notch up.

W W W . D I A B L O S P O R T . C O M